


Bungee Recall Repair Kit Instructions

(Assembly required by an adult)

Tools needed: Phillips Screwdriver and coin.


Parts included:



Oval Locking Link





Folded End with Hole


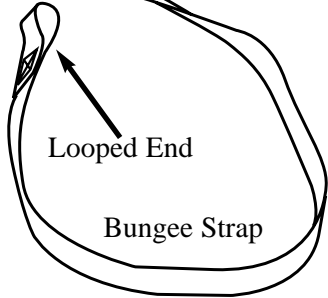


Looped End


Bungee Strap

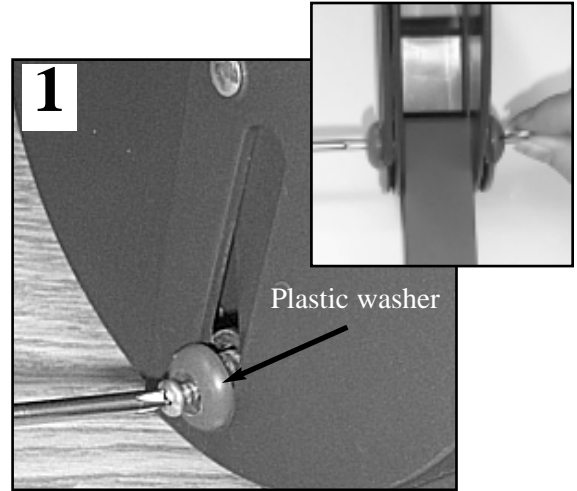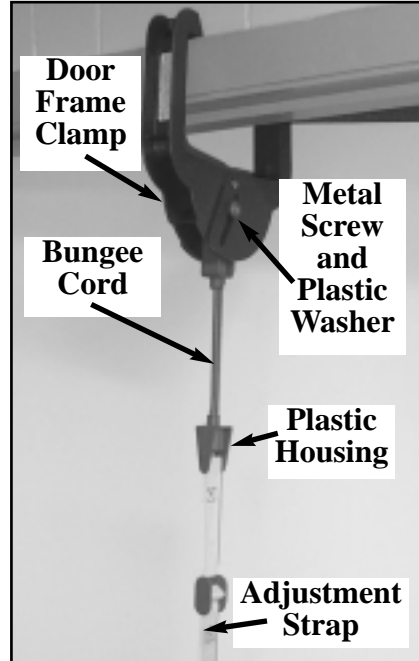


1 Using a phillips screwdriver, remove metal screw and plastic washer from door frame clamp where bungee cord is attached. Use a coin (penny or dime) to hold plastic screw on other side of door frame clamp in place.

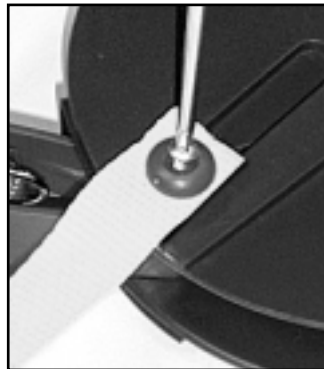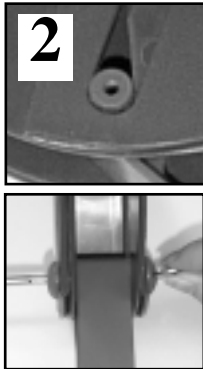



2 Align the hole in the folded end of the bungee strap with the screw hole in door frame clamp. Secure bungee strap with washer and screw; use the coin to hold plastic screw on other side of door frame clamp in place. Make sure screw is tight.

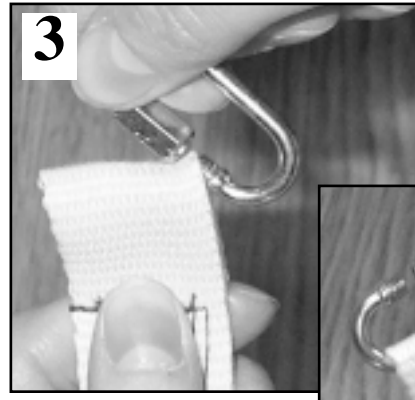


3 Thread the oval locking link through the looped end of the bungee strap.

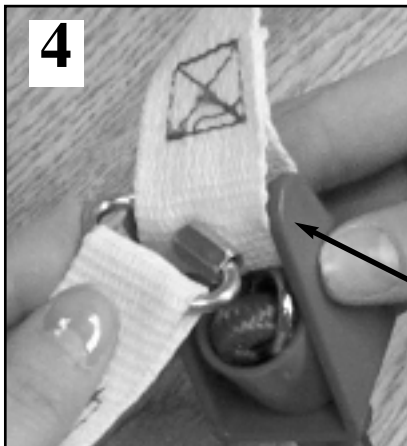

4 Thread oval locking link through the loop of the adjustment strap located at the bottom end of the bungee cord.

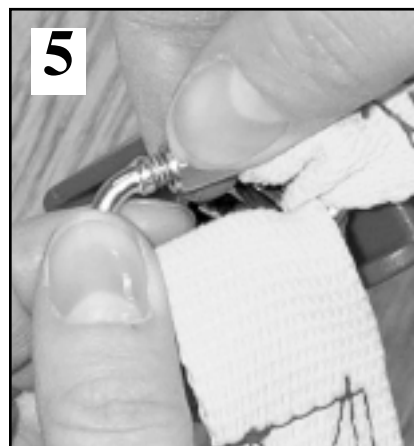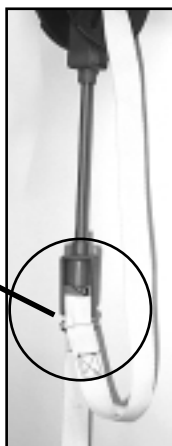

5 Lock oval locking link by screwing clip closed. Finger tighten.

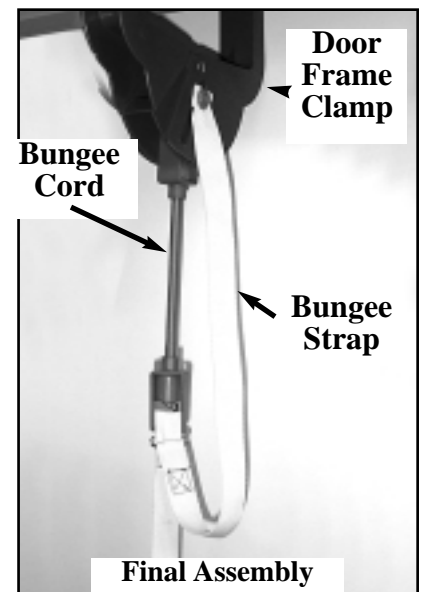

Final Assembly